



Internal structure XMC J-KPX series (for emulsified oil)

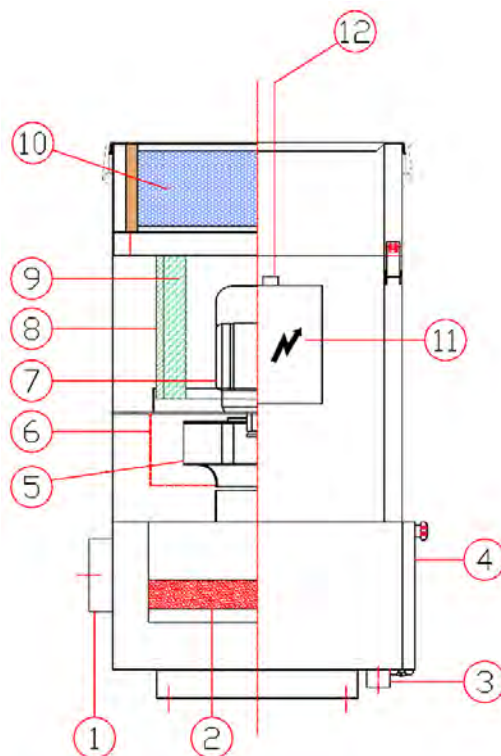

POS.	DESCRIPTION
1	Suction inlet
2	Pre-filter cell efficiency class G4 (according to EN 779 norms)
3	Drainage sleeve \varnothing 40 mm
4	Pre-filter access hatch
5	High prevalence impeller
6	Self-cleaning centrifugal system TCE (<i>True Centrifugal Effect</i>)
7	Three-phase low consumption motor
8	Filtration cartridge medium efficiency class F9 (according to EN 779 norms)
9	Synthetic filters kit efficiency class M6 (according to EN 779 norms)
10	Mechanical post-filter PX Series filtration level 95% efficiency class E11 EPA (according to EN 1822 norms)
11	Control panel with overload cut-out
12	Multifunction LED device for filter status monitoring

Dimensions XMC J-KPX series

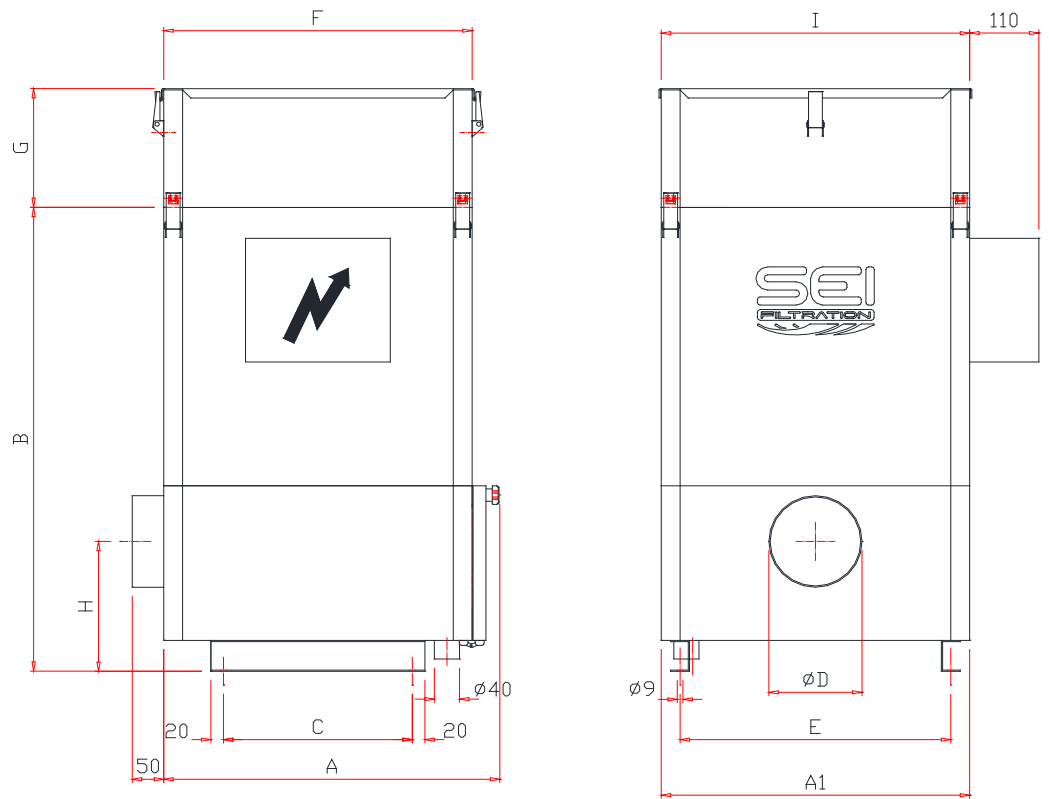

MODEL	WEIGHT KG	A	A1	B	C	D	E	H	POST-FILTER PX		
									F	G	I
XMC 500 J-KPX	67	460	420	650	230	Ø 125	360	175	420	190	420
XMC 1000 J-KPX	85	530	490	750	300	Ø 150	430	210	490	190	490
XMC 1500 J-KPX	130	630	590	900	400	Ø 200	530	240	590	190	590
XMC 2000 J-KPX	161	690	650	1000	460	Ø 250	590	275	650	190	650

*Dimensions expressed in millimeters. Data and characteristics can be changed without warning.